

# GREAT ACCESS | JOBSITE ACCESS - SMALL DETAILS


Access = Success. Make sure we set out people up with “Great Access”

10.5 inch TREAD


7 inch RISE

## Typical Rise & Tread Dimensions

Rise	Tread	Pitch
6"	11.5"	27.55°
6.5"	11"	30.58°
7"	10.5"	33.68°
7.5"	10"	36.87°
8"	9.5"	40.13°
8.5"	9"	43.37°
9"	8.5"	46.63°
9.5"	8"	49.90°

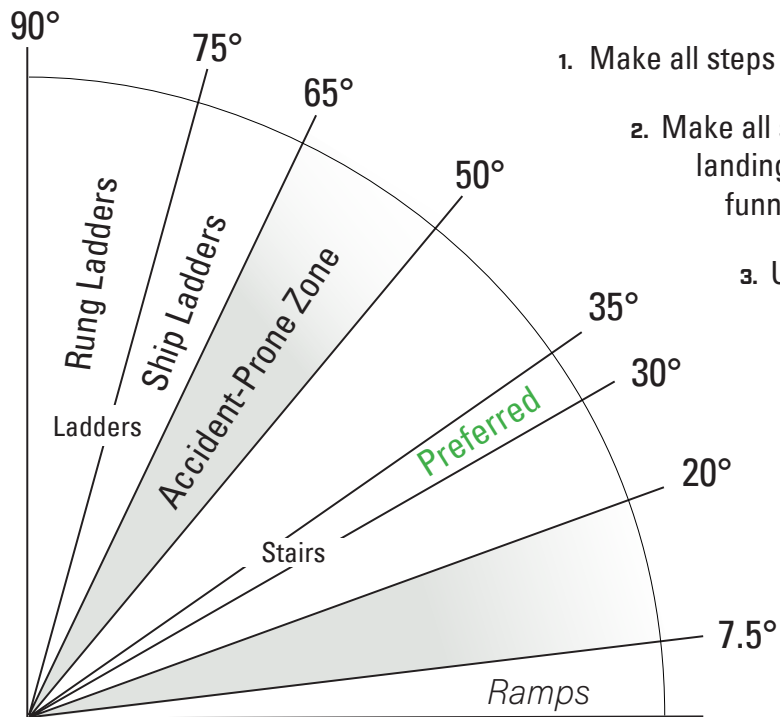

1. Make all steps equal height.
2. Make all stairs as wide as the landing or put delineators to funnel access to the stairs.
3. Use handrails so we don't step off the side.
4. Use rolled roofing for better traction.
5. Paint the edges with hi-vis paint so they catch your eye.

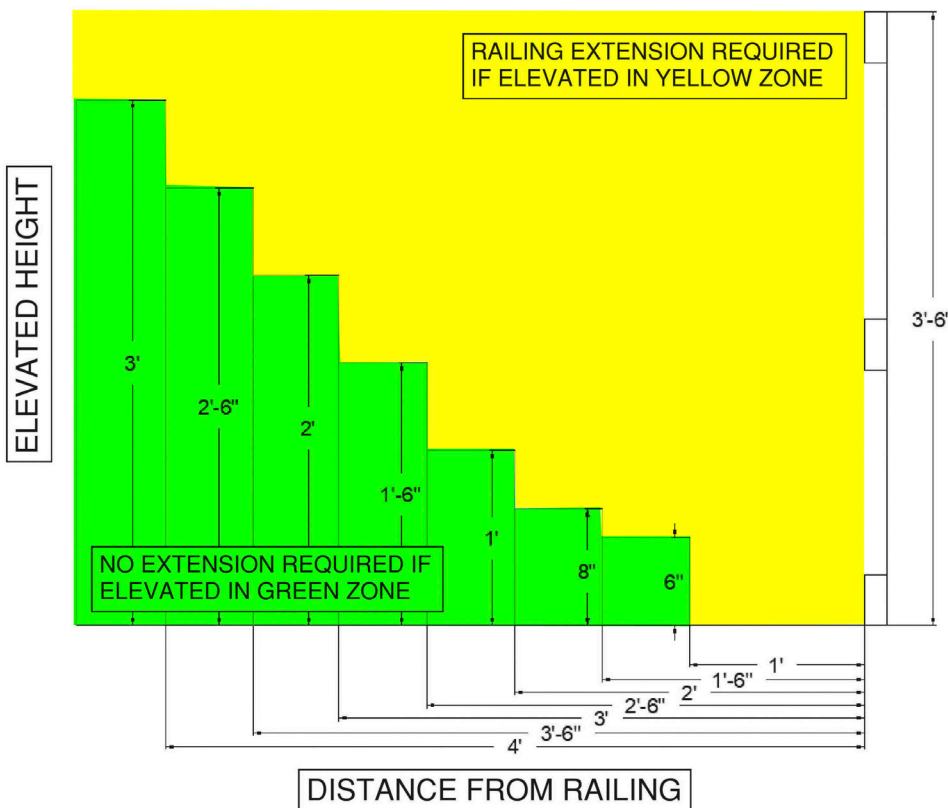

1. Field verify that you need to add onto handrail by using the chart to the left prior to adding any extension.
2. Verify that the handrail is 42" +/- 3" from work deck prior to installing handrail extensions.
3. Make sure you have a TSCD plan prior to building extensions.
4. Follow the KIE memo for testing requirements. Will be provided by your superintendent.